


INDUSTRIAL AIR SERIES COMPRESSOR SYSTEMS FOR 2023

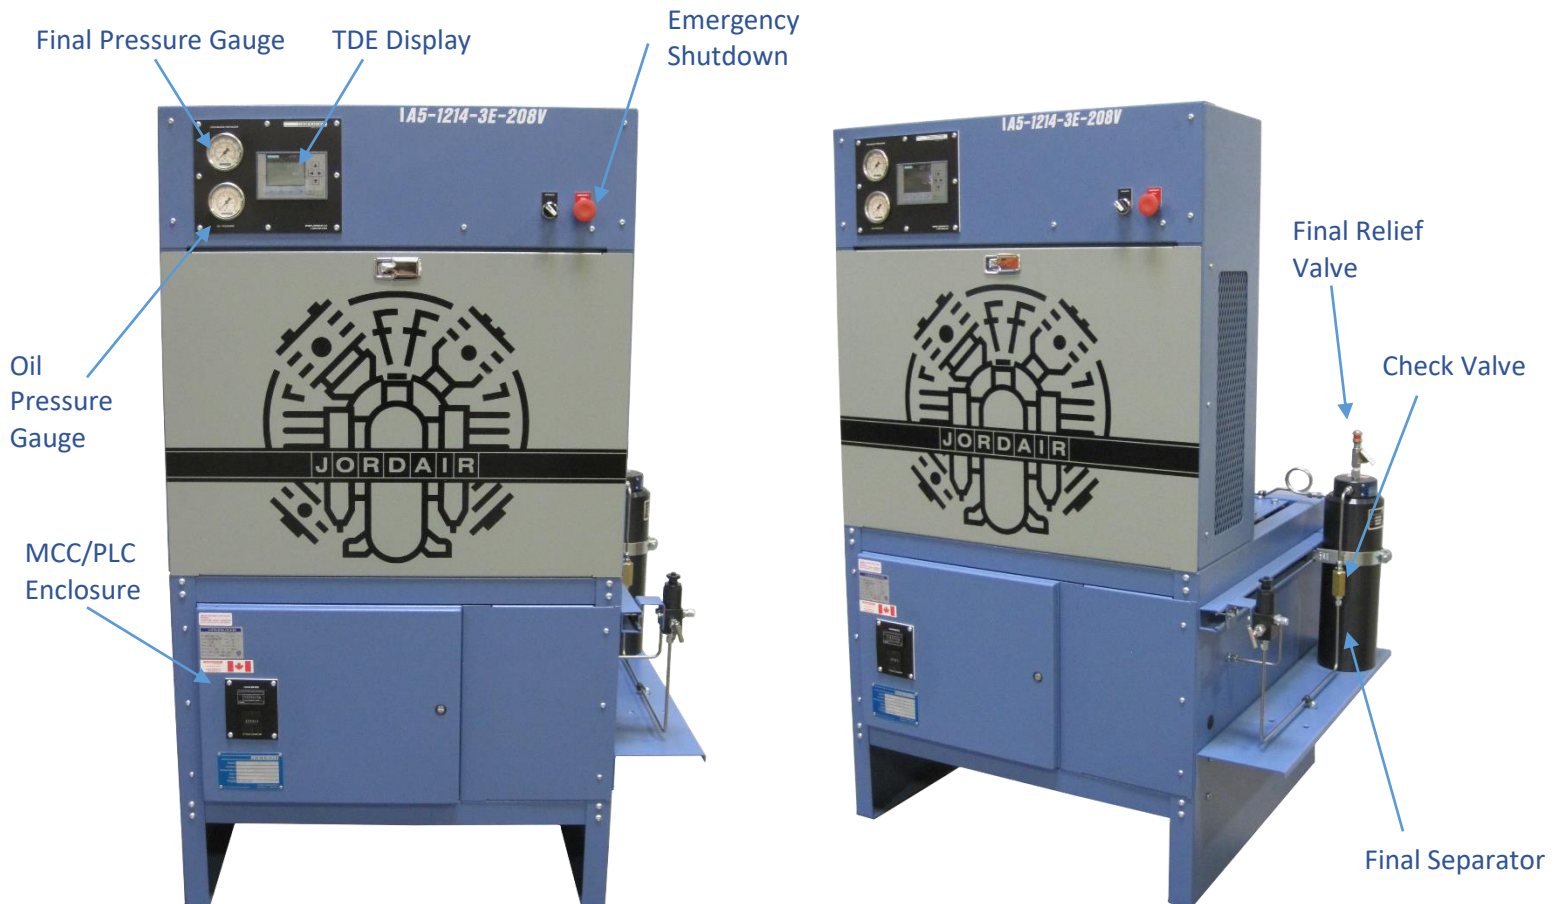

Features a 2-year System and 10-year Block Warranty

Jordair QC Program

- ISO 9001:2015 Cert. FM664273
- CSA Cert. No. LR77799
- CRN Pressure Components
- B&PV Licence MA-2007

System Features:

- Balanced Design
- Low Noise

Block Features:

- Low Oil Consumption
- Oil Filter Cartridge
- High Tech HP Piston
- Heavy Duty Crank

The compressor models shown in this brochure and their electrical controls are registered under CSA and certified accordingly. Changes to any of the electrical controls or components will void the existing CSA certification. A Special Inspection will need to be performed by CSA to certify any custom compressor package. Please consult a Jordair representative for CSA Special Inspection pricing.

Please consult a Jordair representative for a breakdown of all additional costs that may be incurred on a custom compressor.

STANDARD INDUSTRIAL AIR COMPRESSOR FEATURES FOR 2023

The 2023 Industrial Air Compressor features a new identity with two tone colour and ease of service from the rear of the unit. Many new features provide a service friendly and technically advanced design with active customer interface. Includes nationally certified 7300 PSIG filter systems for added safety and extended component life of 35 operating years.

SCOPE OF SUPPLY AND OPTIONS

- Logo 8 PLC with panel mounted 4" x 4" TDE 6 line screen showing compressor fault data
- Low oil alarm and screen display of the fault
- High temperature alarm and screen display of the fault
- Final pressure switch set for customers required shut down pressure
- Auto-run and manual mode operation with emergency shutdown button
- Optional Connection to the customer and service technicians cell phone
- Panel mounted pressure gauge display for final pressure and oil pressure
- Inter-stage pressure gauges are mounted on the block and visible at the back side of the compressor
- Nationally certified CRN registered 7300 PSIG final oil/water final coalescing separator
- Final separator cycle counter to ensure filter system safety and record pressure cycles
- Cycle count is displayed on the panel mounted display screen
- Filter system life rated for 35 years or 100,000 pressure cycles
- Automatic condensate drain and silent collection system

Larger capacity compressors up to 250 KW are available upon request. Please consult with a Jordair Compressors representative for technical data and factory quote.

INDUSTRIAL AIR COMPRESSORS

5300 PSIG COMPRESSORS

MODEL	FLOW RATE	MOTOR	OIL & WATER SEPARATOR	WEIGHT	SIZE (CM) H x D x W
IA5-100-1E	4.4 SCFM	5.0 HP	JS-7300-A-1008	220 KG	120 x 85 x 99
IA5-100-3E	4.4 SCFM	5.0 HP	JS-7300-A-1008	220 KG	120 x 85 x 99
IA5-120-1E	7.6 SCFM	7.5 HP	JS-7300-A-1008	250 KG	120 x 85 x 99
IA5-120-3E	7.6 SCFM	7.5 HP	JS-7300-A-1008	250 KG	120 x 85 x 99
IA5-1214-1E	10.6 SCFM	10.0 HP	JS-7300-A-1008	320 KG	120 x 85 x 99
IA5-1214-3E	10.6 SCFM	10.0 HP	JS-7300-A-1008	320 KG	120 x 85 x 99
IA5-151-3E	14.8 SCFM	15.0 HP	JS-7300-A-1008	380 KG	152 x 85 x 137
IA5-150-3E	17.7 SCFM	15.0 HP	JS-7300-A-1008	380 KG	152 x 85 x 137
IA5-180-3E	21.9 SCFM	20.0 HP	JS-7300-A-1008	400 KG	152 x 85 x 137

All 5300 PSIG systems are supplied with the new Jordair 6500/7300 PSIG filter system and protected with a 5500 PSIG relief valve.

6100 PSIG

MODEL	FLOW RATE	MOTOR	OIL & WATER SEPARATOR	WEIGHT	SIZE (CM) H x D x W
IA6-100-1E	3.5 SCFM	5.0 HP	JS-7300-A-1008	220 KG	120 x 85 x 99
IA6-100-3E	3.5 SCFM	5.0 HP	JS-7300-A-1008	220 KG	120 x 85 x 99
IA6-120-1E	6.0 SCFM	7.5 HP	JS-7300-A-1008	250 KG	120 x 85 x 99
IA6-120-3E	6.0 SCFM	7.5 HP	JS-7300-A-1008	250 KG	120 x 85 x 99
IA6-1214-1E	10.2 SCFM	10.0 HP	JS-7300-A-1008	320 KG	120 x 85 x 99
IA6-1214-3E	10.2 SCFM	10.0 HP	JS-7300-A-1008	320 KG	120 x 85 x 99
IA6-1511-3E	14.8 SCFM	15 HP	JS-7300-A-1008	430 KG	152 x 85 x 110
IA6-181-3E	18.0 SCFM	20 HP	JS-7300-A-1008	450 KG	152 x 85 x 110

All 6100 PSIG systems are supplied with the new Jordair 6500/7300 PSIG filter system and protected with a 6500 PSIG relief valve.

7300 PSIG COMPRESSORS

MODEL	FLOW RATE	MOTOR	OIL & WATER SEPARATOR	WEIGHT	SIZE (CM) H x D x W
IA7-1511-3E	15.0 SCFM	15.0 HP	JS-7300-A-1008	430 KG	152 x 85 x 110
IA7-181-3E	19.5 SCFM	20.0 HP	JS-7300-A-1008	450 KG	152 x 85 x 110

All 7300 PSIG systems are supplied with the new Jordair 7300 PSIG filter system and protected with a 7500 PSIG relief valve.

INDUSTRIAL AIR BOOSTER COMPRESSORS

720 PSIG COMPRESSORS

MODEL	FLOW RATE	MOTOR	SUCTION PRESSURE	FINAL PRESSURE	OIL & WATER SEPARATOR	WEIGHT	SIZE (CM) H x D x W
IAB720-123-1E	16/26 SCFM	7.5 HP	72 PSIG	217/580 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB720-123-3E	16/26 SCFM	7.5 HP	72 PSIG	217/580 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB720-123-1E	42/25 SCFM	7.5 HP	109 PSIG	217/720 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB720-123-3E	42/25 SCFM	7.5 HP	109 PSIG	217/720 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB720-123-1E	55/38 SCFM	7.5 HP	145 PSIG	290/720 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB720-123-3E	55/38 SCFM	7.5 HP	145 PSIG	290/720 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB720-124-1E	70/54 SCFM	10.0 HP	188 PSIG	362/720 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB720-124-3E	70/54 SCFM	10.0 HP	188 PSIG	362/720 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99

5000 PSIG COMPRESSORS

MODEL	FLOW RATE	MOTOR	SUCTION PRESSURE	FINAL PRESSURE	OIL & WATER SEPARATOR	WEIGHT	SIZE (CM) H x D x W
IAB5-122-1E	7.0 SCFM	7.5 HP	72 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-122-3E	7.0 SCFM	7.5 HP	72 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-122-1E	10.4 SCFM	7.5 HP	101 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-122-3E	10.4 SCFM	7.5 HP	101 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-122-1E	13.8 SCFM	7.5 HP	130 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-122-3E	13.8 SCFM	7.5 HP	130 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-122-1E	17.0 SCFM	7.5 HP	159 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-122-3E	17.0 SCFM	7.5 HP	159 PSIG	5000 PSIG	JS-7300-A-1008	320 KG	120 x 85 x 99
IAB5-153-3E	18.0 SCFM	15.0 HP	101 PSIG	5000 PSIG	JS-7300-A-1008	380 KG	152 x 85 x 137
IAB5-153-3E	21.0 SCFM	15.0 HP	116 PSIG	5000 PSIG	JS-7300-A-1008	380 KG	152 x 85 x 137
IAB5-153-3E	23.0 SCFM	15.0 HP	130 PSIG	5000 PSIG	JS-7300-A-1008	380 KG	152 x 85 x 137
IAB5-153-3E	26.0 SCFM	15.0 HP	145 PSIG	5000 PSIG	JS-7300-A-1008	380 KG	152 x 85 x 137

Note: Crated size will add 6" to all unit dimensions and 100 lbs to unit weight

ELECTRONIC MONITORS



eWON Flexy Fault Data Transmitter

The FLEXY data transmitter model provides direct access to the compressor and advises when a fault occurs. The transmitter will interface to a smart phone or to a computer system. In the event of a compressor fault and shutdown the data will be transmitted to Jordair, the customer, and the service group for the system. This assists the compressor operator to have immediate knowledge in the event a fault occurs and the shortest response time to resolve the issue.

TECHNICAL DATA

CAPACITY CALCULATIONS

Compressor Flow Rate, or “Charge Rate”, is based on filling a one hour 88 cubic (ft³) SCBA cylinder from the alarm pressure to 4500 PSIG. Note: Technical specifications subject to change without notice

FILTRATION SYSTEM DESCRIPTION

The JS-7300-A-1008 separators are standard for all Industrial Air models. Separator element should be changed every three months in order to minimize oil carry over in the air stream.

ORDERING INFORMATION

Single Phase Voltages Available: (-1E) 208V, 230V

Three Phase Voltages Available: (-3E) 208V, 230V, 460V, 575V

When placing an order, add the voltage at the end of the model number (e.g. IAB720-123-1E-230V)

Standard production is 60Hz, consult the factory for 50 Hz requirements and other voltages

Weights and Sizes are approximations and are subject to change without notice. For exact weights and dimensions please consult a Jordair representative.

COMPRESSOR UPGRADE OPTIONS

COMPRESSOR FRAME COLOUR:

J-PCU	Change compressor frame powder coating color
J-USP-LF	Complete set of Enclosed Panels - Non Insulated (Large Frame) - 151 to 181
J-CFIP-LF	Complete silent insulation package for the compressor frame
J-E-FAN-16-A	Cooling fan for fully enclosed unit - 100 to 1214
J-E-FAN-24-A	Cooling fan for fully enclosed unit - 151 to 181

For a fully enclosed silent compressor see the **AIR-KAT Silent brochure** for added features

COMPRESSOR CONTROLS & INLET ACCESSORIES:

J-LOGO-TUG	Logo 8 module upgrade for oil, final and temperature transmitters
J-S-TP700	Siemens TP700 screen required with the Logo 8 PLC update
J-E-KIT-SWITCH-INLET-1	Inlet Pressure Switch, -30 to 14 PSI
J-E-KIT-SWITCH-INLET-2	Inlet Pressure Switch, 2 to 18 PSI
WIKA-A10	Inlet Pressure Transmitter, -30 +30 PSI
WIKA-A10	Oil Pressure Transmitter
WIKA-A10	Final Pressure Transmitter for Start/Stop
BAY1	Final Temperature Transmitter
J-BASE-SKID	Base skid for mounting of auxiliary components (required for certain add-ons)
J-TANK-60	Inlet Buffer Tank and Fittings
J-PG-PM-CBM-2.5-30+30-D	Inlet Pressure Gauge - (-30 to 30 PSI)
J-PR-125-1.5-3.5-3.8	Inlet Pressure Regulator - 1.5-3.5 PSI Outlet
J-E-SV-2-16-120-P	Inlet Solenoid Valve - 2 Way, 1" FNPT, 120V
J-E-SV-2-24-120-P	Inlet Solenoid Valve - 2 Way, 2" FNPT, 120V
EWON-FLEX	Transmitter to report faults to Jordair, the customer, and the service provider

COMPRESSOR FILTRATION SYSTEM:

JBFB-7300-6-16-A	Add bare filter chamber and fittings - 7300 PSIG, 16" Barrel
JBFB-7300-6-24-A	Add bare filter chamber and fittings - 7300 PSIG, 24" Barrel
JBFB-7300-6-32-A	Add bare filter chamber and fittings - 7300 PSIG, 32" Barrel
80100	Cartridge, Bauer, For 16" Chamber, Drying & Oil
62504	Cartridge, Bauer, For 22" Chamber, Drying
62565	Cartridge, Bauer, For 22" Chamber, Drying & Oil
61686	Cartridge, Bauer, For 22" Chamber, Drying & Oil, Securus
58825	Cartridge, Bauer, For 32" Chamber, Drying
58826	Cartridge, Bauer, For 32" Chamber, Drying & Oil
60036	Cartridge, Bauer, For 32" Chamber, Drying & Oil, Securus

COMPRESSOR SERVICE PARTS LISTS

Note: The following service parts list are for the default model of compressor, models with any changes or upgrades to the filtration system will differ. Consult your compressors original Test Report in the manual to find your systems service parts.

For IK 100, 120, 1214 Models

QTY	Part Name	Part Number
1	Oil Filter	N25326
1	Separator Element	FC-1008-SE
2	Separator O-Ring	J-OR-2-334
2	Separator Backup Ring	J-OR-8-334
1	Synthetic Oil 4 Litre	J-C751-4

For 151, 1511, 150, 180, 181 Models

QTY	Part Name	Part Number
1	Oil Filter	N25326
1	Separator Element	FC-1008-SE
2	Separator O-Ring	J-OR-2-334
2	Separator Backup Ring	J-OR-8-334
2	Synthetic Oil 4 Litre	J-C751-4

Note: Jordair recommends changing both O-rings and backup rings for the filter and separator top and base caps during service as well as inspecting the barrels from both sides for any damage or deterioration. It also provides the opportunity to ensure all threads are in good condition and lubricated.

COMPRESSOR BLOCK TECHNICAL DATA

5000 PSIG BLOCKS

COMPRESSOR BLOCK	SPEED	FLOW RATE	STAGES	MOTOR		FINAL PRESSURE
				HP	kW	
IK100	1270	4.4 SCFM	3	5.0	3.6	5000 PSIG
IK120	1470	7.6 SCFM	3	7.5	5.5	5000 PSIG
IK1214	1470	10.6 SCFM	4	10.0	7.3	5000 PSIG
IK151	1320	15.0 SCFM	4	15.0	11.0	5000 PSIG
IK150	1230	18.0 SCFM	4	15.0	11.0	5000 PSIG
IK180	1320	22.0 SCFM	4	20.0	14.7	5000 PSIG

6000 PSIG BLOCKS

COMPRESSOR BLOCK	SPEED	FLOW RATE	STAGES	MOTOR		FINAL PRESSURE
				HP	kW	
IK100	1050	3.5 SCFM	3	5.0	3.6	6000 PSIG
IK120	1200	6.0 SCFM	3	7.5	5.5	6000 PSIG
IK1214	1470	10.6 SCFM	4	10.0	7.3	6000 PSIG

7000 PSIG BLOCKS

COMPRESSOR BLOCK	SPEED	FLOW RATE	STAGES	MOTOR		FINAL PRESSURE
				HP	kW	
IK1511	1320	15.0 SCFM	4	15.0	11.0	7000 PSIG
IK181	1320	19.5 SCFM	5	20.0	14.7	7000 PSIG

720 PSIG BOOSTER BLOCKS

COMPRESSOR BLOCK	SPEED	FLOW RATE	STAGES	MOTOR		SUCTION PRESSURE	FINAL PRESSURE
				HP	kW		
BK123*	1300 RPM	16/26 SCFM	1	7.5	5.5	72 PSIG	217/580 PSIG
BK123	1300 RPM	42/25 SCFM	1	7.5	5.5	109 PSIG	217/720 PSIG
BK123	1300 RPM	55/38 SCFM	1	7.5	5.5	145 PSIG	290/720 PSIG
BK124	1300 RPM	70/54 SCFM	1	10.0	7.3	188 PSIG	362/720 PSIG


5000 PSIG BOOSTER BLOCKS

COMPRESSOR BLOCK	SPEED	FLOW RATE	STAGES	MOTOR		SUCTION PRESSURE	FINAL PRESSURE
				HP	kW		
BK122	1230 RPM	7.0 SCFM	2	7.5	5.5	72 PSIG	5000 PSIG
BK122	1230 RPM	10.4 SCFM	2	7.5	5.5	101 PSIG	5000 PSIG
BK122	1230 RPM	13.8 SCFM	2	7.5	5.5	130 PSIG	5000 PSIG
BK122	1230 RPM	17.0 SCFM	2	7.5	5.5	159 PSIG	5000 PSIG
BK153	1140 RPM	18.0 SCFM	2	15.0	11.0	101 PSIG	5000 PSIG
BK153	1140 RPM	21.0 SCFM	2	15.0	11.0	116 PSIG	5000 PSIG
BK153	1140 RPM	23.0 SCFM	2	15.0	11.0	130 PSIG	5000 PSIG
BK153	1140 RPM	26.0 SCFM	2	15.0	11.0	145 PSIG	5000 PSIG

* Paired rows share the same compressor block. The model number with the * is the actual block number. The other compressor blocks run at different speeds and therefore have been given a different number.

BAUER COMPRESSOR BLOCK FEATURES

- High velocity, full flow cooling fan assembly that produces high velocity airflow over the coolers, pressure cylinders and crankcase to cool the compressed air and lubricating oil.
- Drive gear designed for an operating life of up to 30,000 hours.
- Stainless steel inter-coolers and after-coolers for high efficiency cooling and corrosion free operation.
- Cylinders are hardened through a plasma-nitrate process for up to 10,000 hours of operating life and low wear with excellent lubricating oil retention.
- Redesigned rings for the HP piston are synthetic material for low wear and a long operating life with very little oil carry over.
- Single-piece crankcase made of a high strength aluminum alloy for higher stability, larger oil capacity, and low vibration.
- Full flow oil system with a crankshaft-driven gear pump and full flow oil filter.
- Visual oil level indicator is designed show the accurate oil level.
- Reed valve on the first stage which offers higher efficiency and redesigned intake filter reduces intake valve noise.
- Final stage oil cooled cylinder and cylinder-head for lower air discharge temperature.
- Bauer compressor blocks provide the highest level of reliability and virtually no oil carryover into the compressed air stream. This ensures perfect filtration with original Bauer filter cartridges and the longest cartridge life.

IK100, IK100-420**IK120, IK120-420****IK1214****IK151, IK1511****IK150, IK180****IK181****IK220**

NOTE: Jordair reserves the right to change models or scope of supply at its own discretion and without notice; obtaining current factory quotations and technical product descriptions is highly recommended.